

1

2

3

4

A

A

Slopes

Scross slopes

The Defender Barrier may be placed on cross slopes up to 10%(6 deg.)(Figure 1)

Longitudinal slopes

The Defender Barrier may be placed on longitudinal slopes up to 5%(3 deg.)(Figure 2)

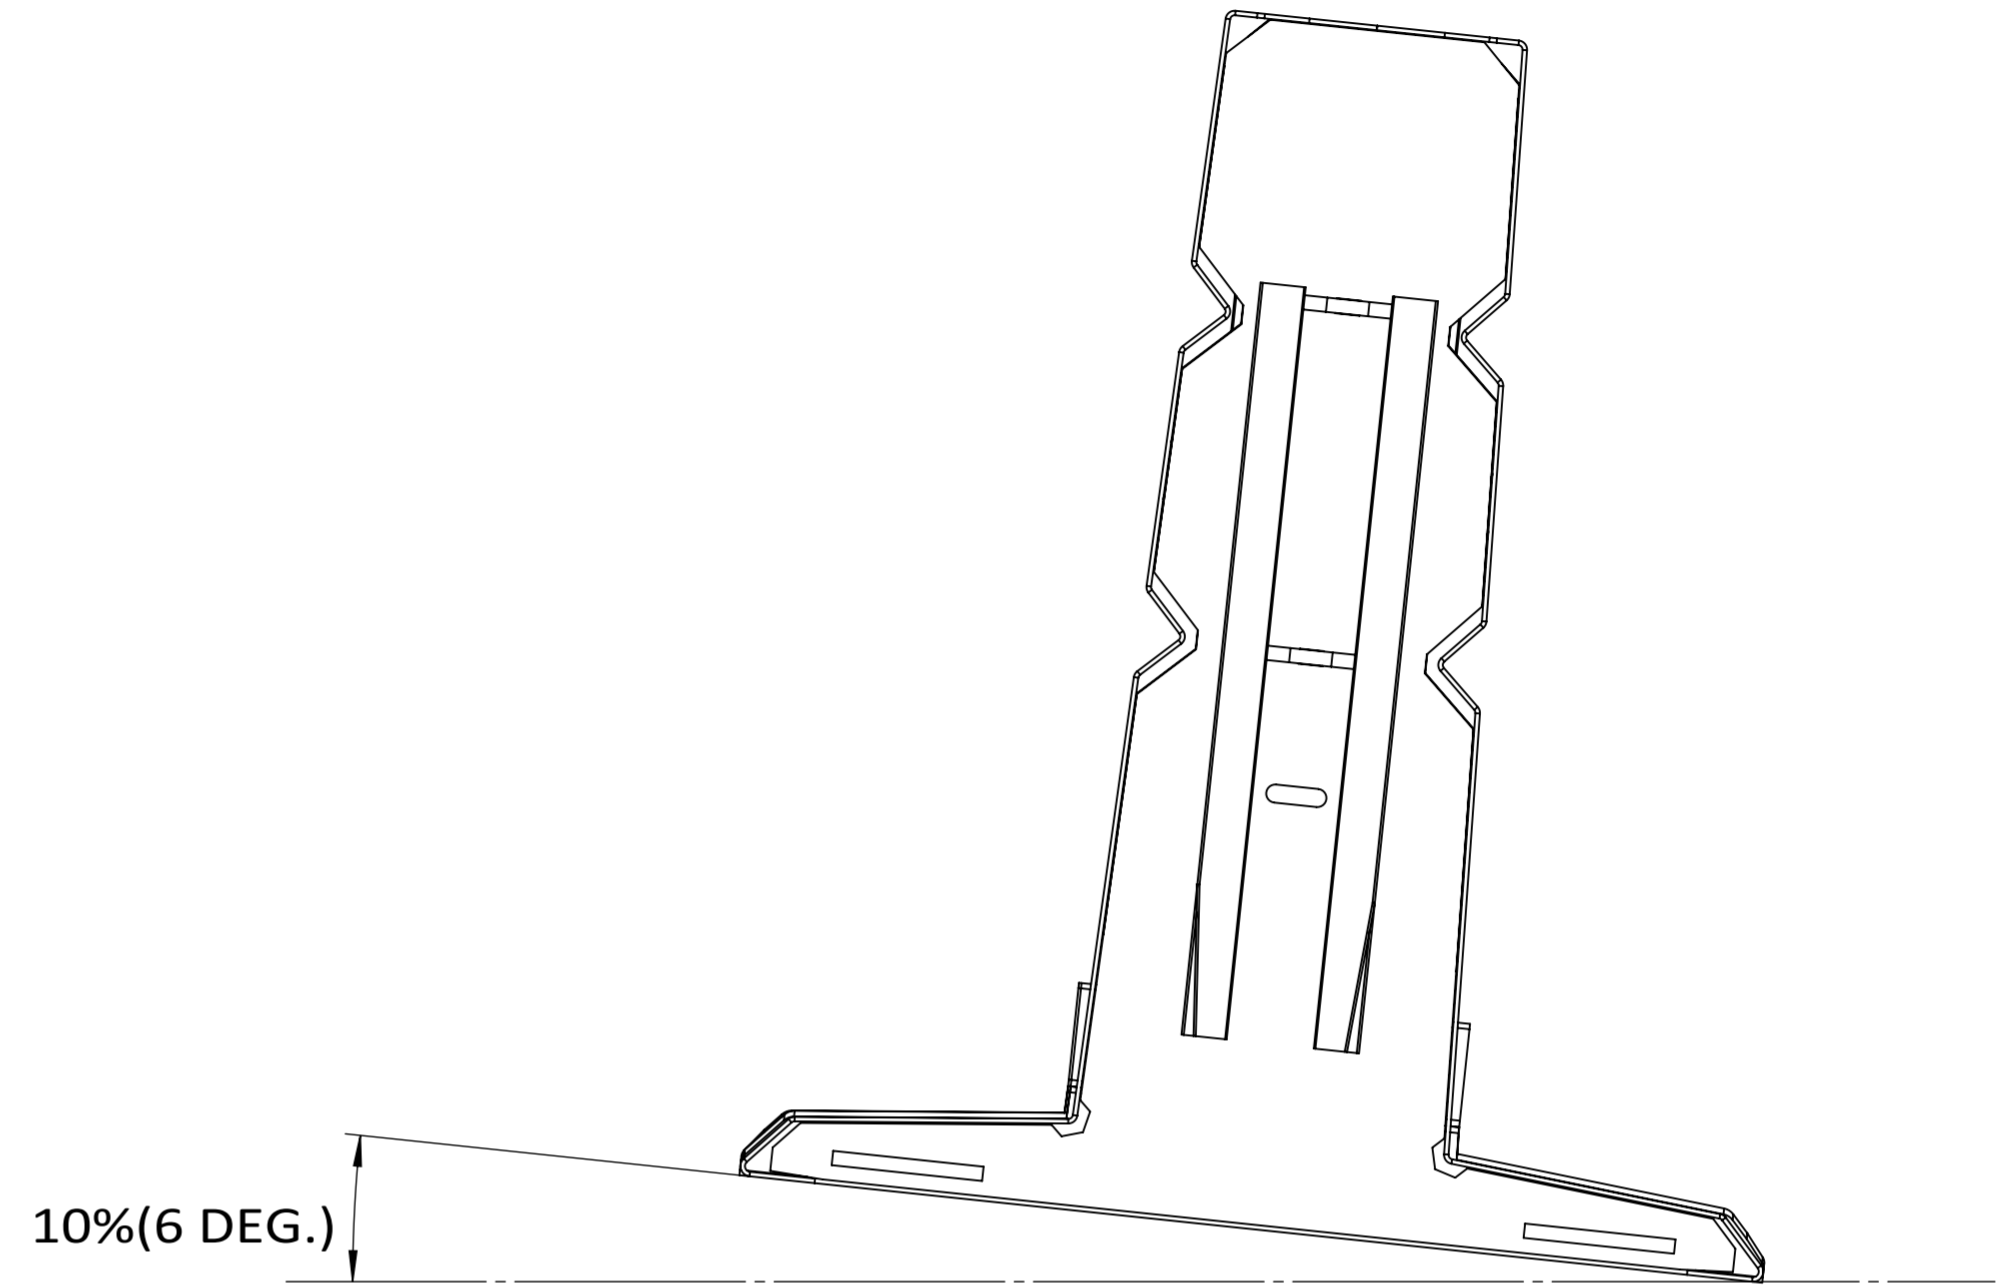


Figure 1

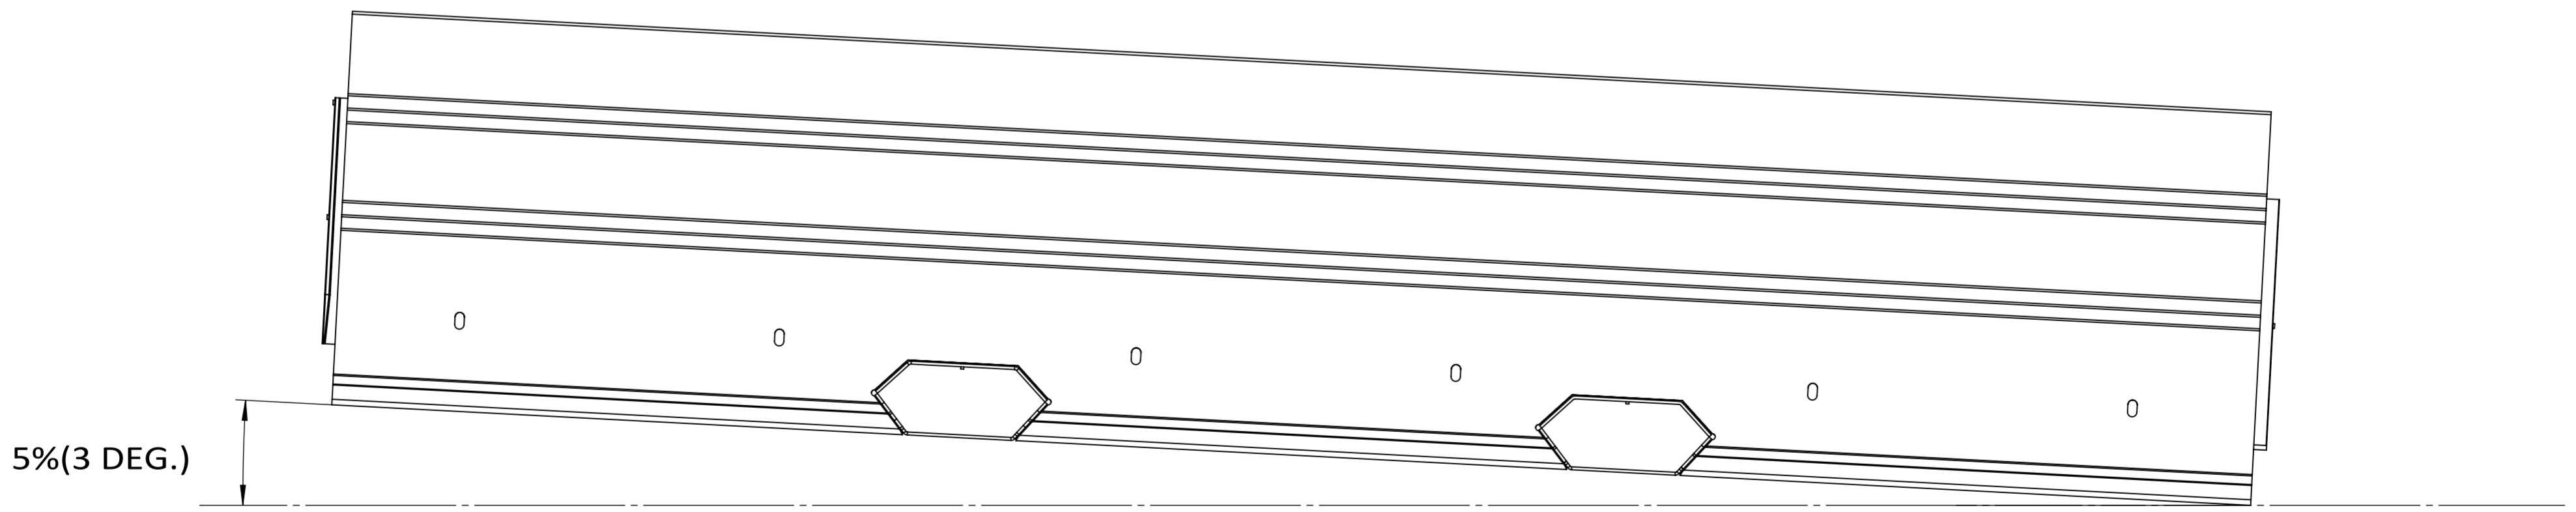


Figure 2

					Tolerances unless otherwise stated		MATERIAL		SEE PARTS TABLE		SAFE BARRIERS		DRAWING DESCRIPTION		DEFENDER MAIN BODY SLOPES				
					Machining: up to 300mm ±0.50		FINISH		SELF COLOR				DRAWING REF.						
					300 to ~ ±0.80		WEIGHT		320 KG GALV		DRAWN BY		DC	CHECKED	RM	APPROVED		RH	
					Fabrication: up to 300mm ±2.00		DIMENSIONS		MM		SHEET 1 of 1								
					300 to 1000mm ±3.00		DATE												
					1000 to ~ ±6.00														
					Angular: all ±2.0°														
REV	DATE	DESCRIPTION	DRAWN	APPRD.															

1

2

3

4

D

D