


# DEFENDER BARRIER - SAFE LIFTER USER GUIDE



## Pre-Start Safety

- Safe Lifter has been independently certified for use with Defender Barrier
- Safe Lifter has a load limit of 3000 kg. Confirm load is within the limit.
- Connect a suitable Tag Line to the Tag Line Connector Point behind the lifter pads
- Connect a suitable chain or strap from the crane to the Lifting Point
- Check that Rubber Pads are clean and in good order
- Check that all fasteners are secure
- All requisite PPE should be worn

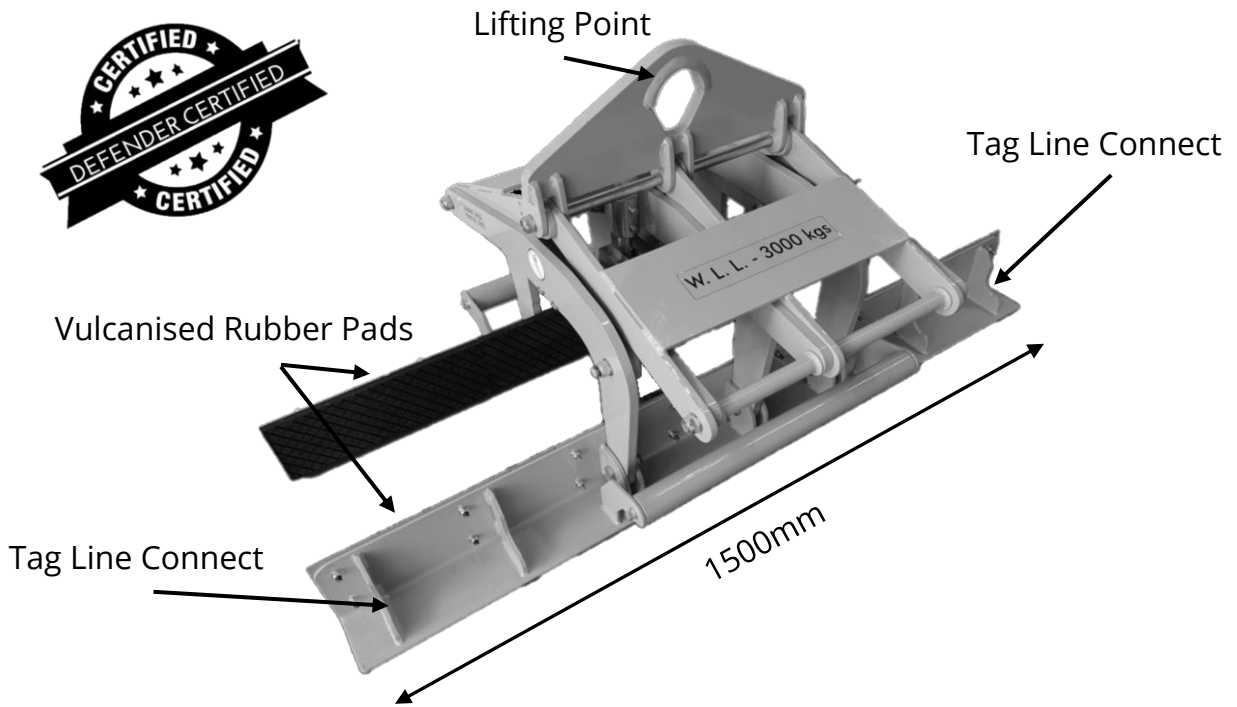

**Keep hands clear of Safe Lifter when in use.  
Crush Hazard**



## Pick and Place

- Position Safe Lifter over the centre of the Defender Barrier
- Lower the lifter squarely over the centre of the Barrier to ensure the load is balanced during the lift
- Ensure that the barrier is inserted fully into the opening depth of the jaws
- Lift slowly and the jaws compress to grip the barrier
- Lift the barrier into place
- When completely lowered the jaws will release and lock open ready for the next lift



**Do not stand under the load.  
Use Tag Line for Barrier and Lifter control.**

# DEFENDER BARRIER - SAFE LIFTER USER GUIDE

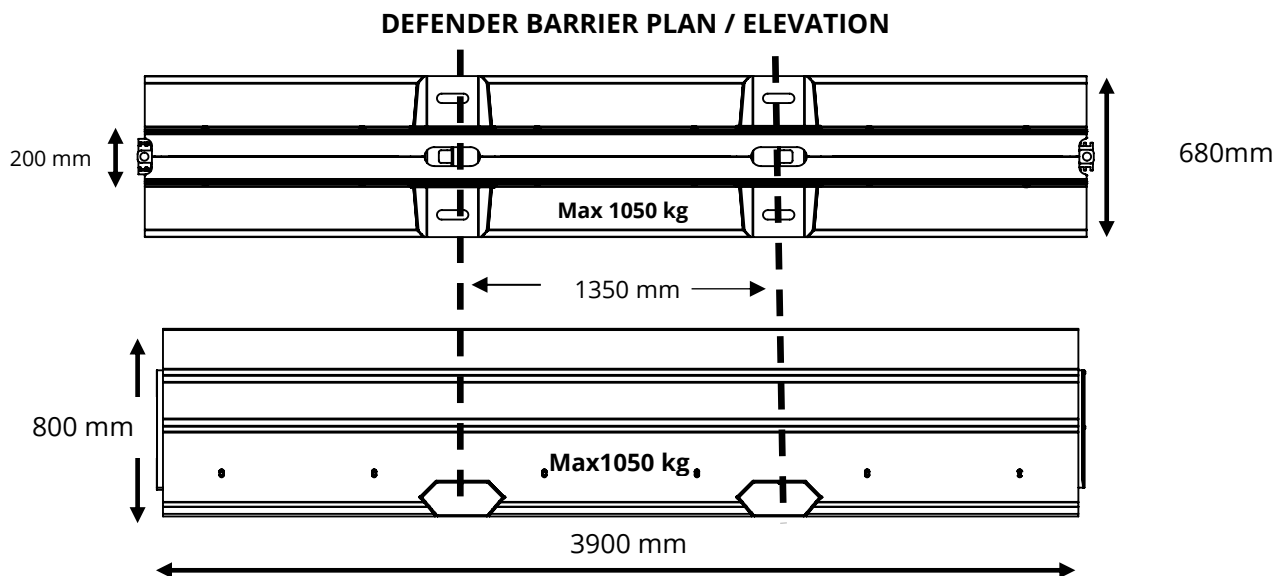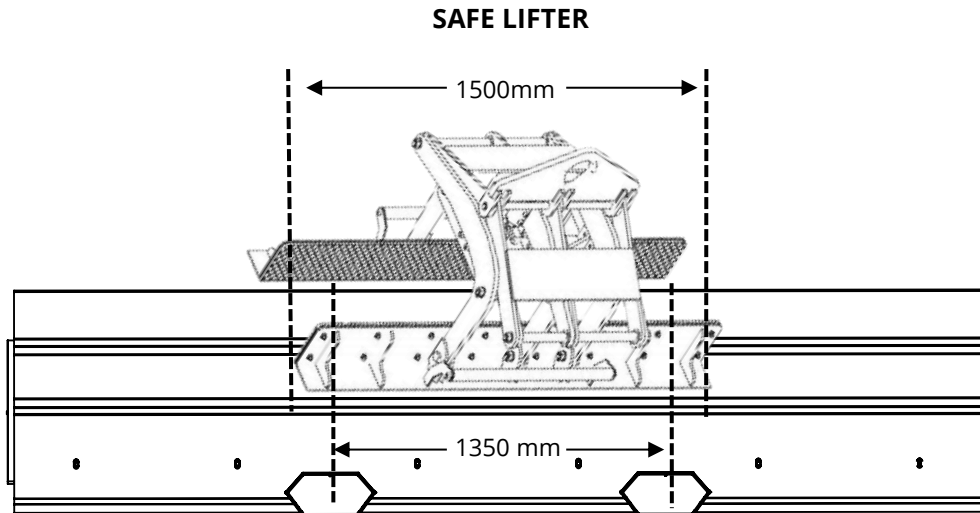

## Safety Inspection

- 12 monthly inspections required per AS4991-2004 – ‘periodic inspection guide for lifting devices’
- Safe Barriers recommends inspection at each use
  - Check lifter’s structure for visual damage
  - Check rubber pads to ensure they are clean
  - Check entire lifter for cracks, cuts, corrosion or deficiency
  - Check lifter has no missing parts
  - Repair all faults before using the lifter